



Attero Tech by QSC  
Axon A8Mio | Axon A4Mio

AES67 Network Audio I/O Endpoints

Features

- A8Mio: 8x8 mic/line analog I/O
- A4Mio: 4x4 mic/line analog I/O
- Software-controlled preamps
- PoE powered
- AES67 network daisy chain support
- Q-SYS plugin support
- 1/3 RU (A4Mio) and 1/2 RU (A8Mio) with table and rack mounting accessories




Applications: Boardrooms • House of Worship • Fitness •  
Huddle Spaces • Higher Education • Courtrooms

The Axon A8Mio and A4Mio are high-performance, AES67 network audio I/O endpoints for installed AV systems, including the Q-SYS Ecosystem. These fixed-channel endpoints offer a cost-effective I/O solution to integrate analog audio channels into a wide range of network audio applications while maintaining small form factors.

**Simple Q-SYS Ecosystem Integration:** QSC-developed control plugin helps expedite the installation process, allowing integrators to drag-and-drop Axon audio endpoints into a Q-SYS design without the need for any complicated control programming. The plugin enables full preamp control on Q-SYS control devices.


Application Example

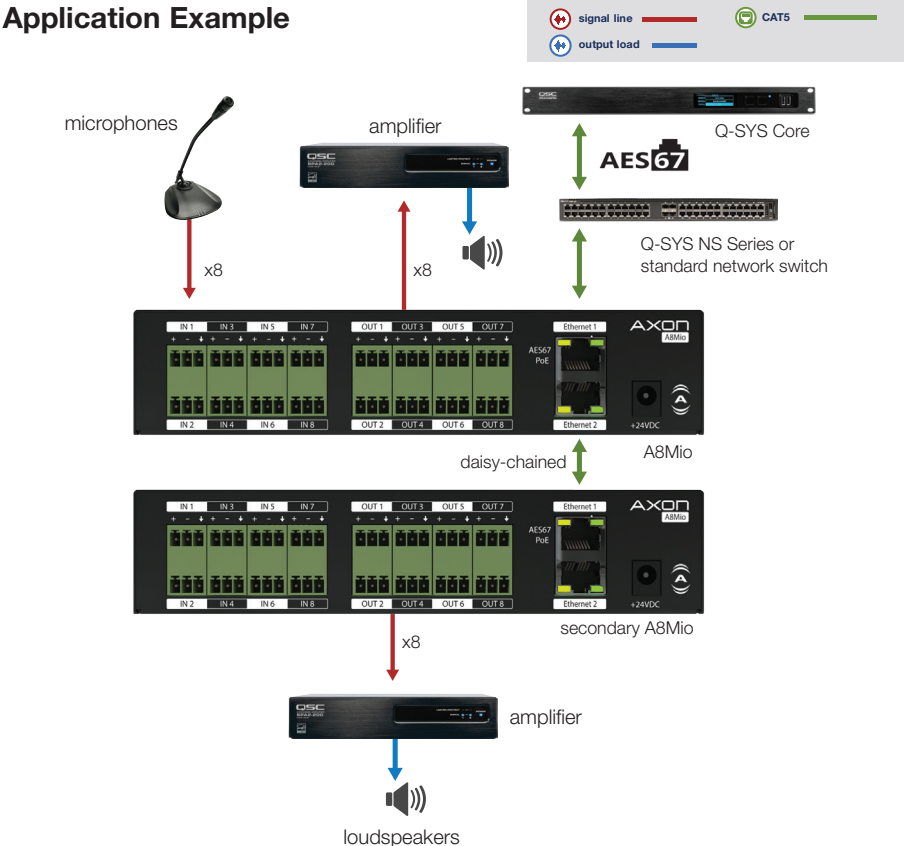

# Axon A4Mio | A8Mio Details

## A4Mio Specifications

Audio Inputs (Mic/Line)		General	
Connector type	3.81 mm Euro, 3 position (16-28 AWG)	Dimensions (HWD)	1.6 x 5.4 x 7.9 in (40.6 x 137.2 x 200.7 mm)
Gain	-8 dB to +34 dB gain, 1 dB increments	Weight	1.8 lb (0.83 kg)
Input impedance	>2 K $\Omega$ at any gain	Mounting options	Rack-mountable, 1 RU 1/3-rack width Surface-mountable *All mounting hardware offered as accessories
Maximum input level	-8 dB gain, max input = +16.5 dBu (+24 dBu w/pad)	Regulatory compliance	FCC Part 15, Subpart B, Class A EMC CE (EN55032 EMC / EN55035 ESD) WEEE RoHS REACH
THD+N	<0.05% @ 1 kHz, -3 dBFS input. 20-20 kHz	Network	
Frequency response	20-20 kHz, +/- 1 dB (Line), 50-20 kHz +/- 1 dB (Mic)	Physical layer	Ethernet
EIN	-125 dBu	Connector (s)	Dual RJ-45
		Cable quality	CAT-5e or better, UTP
		Transmission speed	1 Gbps
Audio Line Outputs		AES67 Audio Network	
Connector type	3.81 mm Euro, 3 position (16-28 AWG)	Stream announcement	Ethernet
Maximum output levels	+24 dBu (-15.5 dBu w/pad)	Sample rate	Dual RJ-45
THD+N	<0.05% @ 1 kHz, -3 dBFS input. 20-20 kHz	Packet time / latency	CAT-5e or better, UTP
Frequency response	20-20 kHz, +/- 1 dB (mic/line)		
Dynamic range	100 dB	Environmental	
		Operating temperature	0 to 40° C

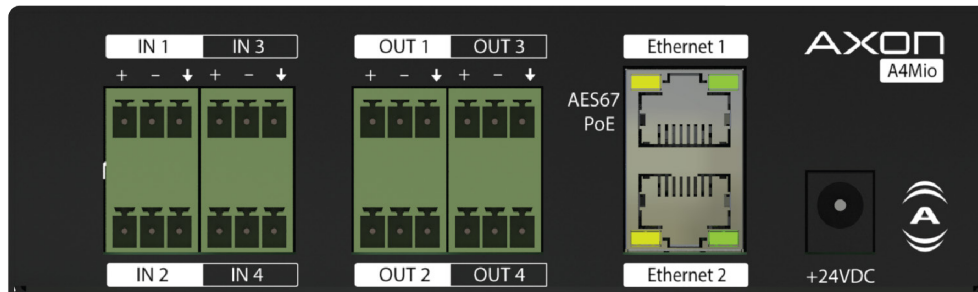

# Axon A4Mio | A8Mio Details

## A8Mio Specifications

Audio Inputs (Mic/Line)		General	
Connector type	3.81 mm Euro-block, 3 position (16-28 AWG)	Dimensions (HWD)	1.6 x 7.4 x 8 in (40.6 x 188 x 203 mm)
Gain	-8 dB to +34 dB gain, 1 dB increments	Weight	2.1 lbs (0.95 kg)
Input impedance	>2 K $\Omega$ at any gain	Mounting options	Rack-mountable, 1 RU 1/3-rack width Surface-mountable *All mounting hardware offered as accessories
Maximum input level	-8 dB Gain, max input = +16.5 dBu (+24 dBu w/pad)	Regulatory compliance	FCC Part 15, Subpart B, Class A EMC CE (EN55032 EMC / EN55035 ESD) WEEE RoHS REACH
THD+N	<0.05% @ 1 kHz, -3 dBFS input. 20-20 kHz	Network	
Frequency response	20-20 kHz, +/- 1 dB (line), 50-20 kHz +/- 1 dB (mic)	Physical layer	Ethernet
EIN	-125 dBu	Connector (s)	Dual RJ-45
Audio Line Outputs		Cable quality	CAT-5e or better, UTP
Connector type	3.81 mm Euro-block, 3 position (16-28 AWG)	Transmission speed	1 Gbps
Maximum output levels	+24 dBu (-15.5 dBu w/pad)	AES67 Audio Network	
THD+N	<0.05% @ 1 kHz, -3 dBFS input. 20-20 kHz	Stream announcement	Ethernet
Frequency response	20-20 kHz, +/- 1 dB (Mic/Line)	Sample rate	Dual RJ-45
Dynamic range	100 dB	Packet time / latency	CAT-5e or better, UTP
		Environmental	
		Operating temperature	0 to 40° C

